


# 565-585W

## N-type Monofacial Module US-BBT72



30-year lifespan delivers 10-30% more power compared with conventional P-type modules

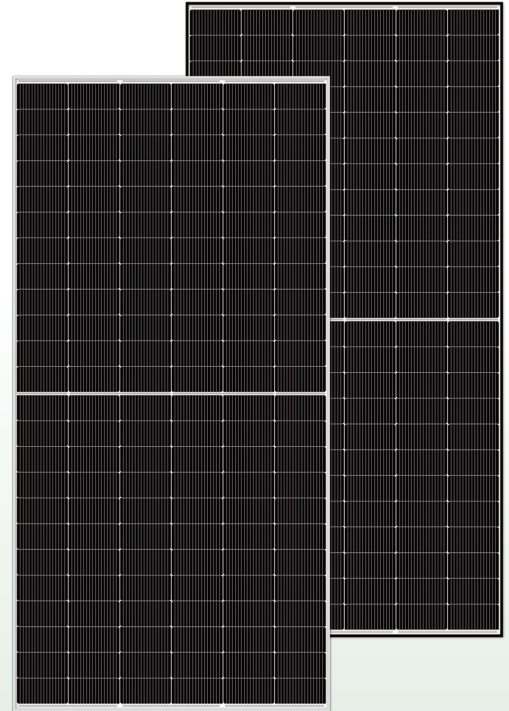

The natural lack of LID in the N-type solar cell can increase power generation



Excellent low irradiance performance



Better light trapping and current collection to improve module power output and reliability



Industry-leading, lowest thermal coefficient



Optimized electrical design and lower operating current for reduced hot spot loss and better temperature



Certified to withstand 2400 Pa of wind load and 5400 Pa of snow load



100% triple EL test, which greatly reduces the hidden cracks rate

### WARRANTY INSURANCE



\* Optional performance warranty insurance. Please contact our local sales staff for more information.

### COMPREHENSIVE CERTIFICATES



ISO 9001: Quality Management System


ISO 14001: Environmental Management System Standard

ISO 45001: International Occupational Health and Safety Assessment System Standard

SA8000: 2014 Social Accountability Management System

\* Different markets have different certification requirements. Also, the products are under rapid innovation. Please confirm the certification status with regional sales representatives.

### LINEAR PERFORMANCE WARRANTY

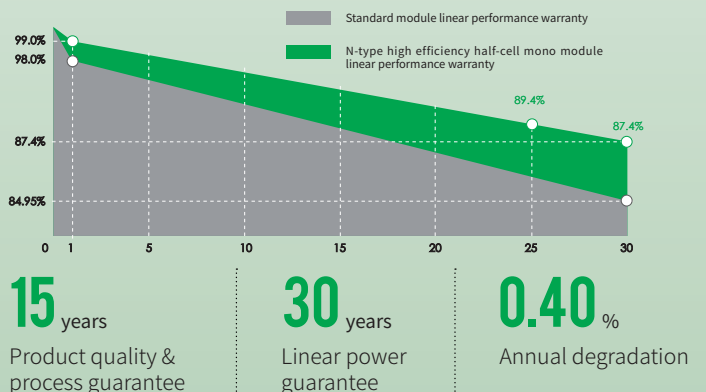

## ELECTRICAL CHARACTERISTICS

Model of modules	US-BBT72(565)		US-BBT72(570)		US-BBT72(575)		US-BBT72(580)		US-BBT72(585)	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum power — $P_{mp}$ (W)	565	421	570	425	575	428	580	432	585	436
Open-circuit voltage — $V_{oc}$ (V)	51.45	48.57	51.60	48.71	51.75	48.85	51.90	48.99	52.09	49.17
Short-circuit current — $I_{sc}$ (A)	13.46	10.87	13.51	10.92	13.56	10.96	13.61	11.00	13.68	11.05
Maximum power voltage — $V_{mp}$ (V)	44.10	41.28	44.23	41.41	44.35	41.52	44.48	41.64	44.61	41.76
Maximum power current — $I_{mp}$ (A)	12.81	10.19	12.89	10.26	12.96	10.31	13.04	10.38	13.12	10.44
Module efficiency — $\eta_m$ (%)	21.9		22.1		22.3		22.5		22.6	
Power tolerance (W)	(0,+5)									
Maximum system voltage (V)	1500									
Maximum rated fuse current (A)	25									
Current operating temperature (°C)	-40~+85 °C									

**STC** (Standard Testing Conditions): Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25 °C , Spectra at AM1.5

**NOCT** (Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C , Spectra at AM1.5, Wind at 1m/s

## STRUCTURAL CHARACTERISTICS

Module dimensions (L*W*H)	2278 x 1134 x 30 mm
Weight	27.6 kg
Number of cells	144 cells
Cell	N-type monocrystalline
Glass	Tempered, 3.2 mm AR, high transmittance, low iron
Frame	Anodized aluminum alloy (Silver/Black)
Junction box	IP68, 3 bypass diodes
Output wire	4.0 mm <sup>2</sup> , wire length: 300mm/1200mm/customized
Connector	MC4 Compatible
Mechanical load	Snow load: 5400 Pa * / Wind load: 2400 Pa ☺


## TEMPERATURE PERFORMANCE RATINGS

TANGRA temperature coefficient ( $P_{max}$ )	-0.30 %/°C
Temperature coefficient ( $V_{oc}$ )	-0.28 %/°C
Temperature coefficient ( $I_{sc}$ )	+0.04 %/°C
Nominal operating cell temperature	43±2 °C



## PACKAGING CONFIGURATION

Container	40HQ
Quantity/pallet	36
Pallets/container	20
Quantity/container	720

## MODULE DIMENSIONS (MM)

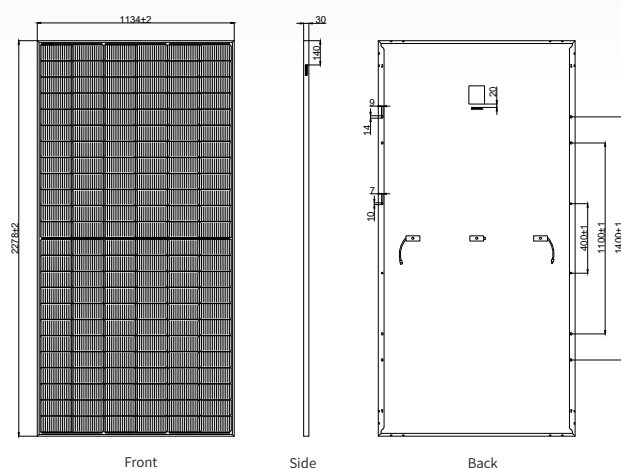

\* The unmarked tolerance is ±1 mm  
Length shown in mm

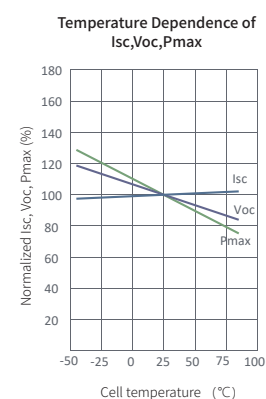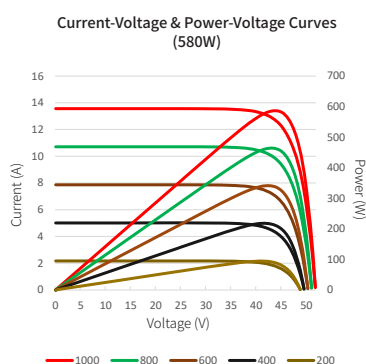

### Universun Technology Co., Ltd

Room 257, No.7 Factory Building, Fuyang Industrial Square, Fuyuan Road, Chengyang Street, Economic and Technological Development Zone, Xiangcheng District, Suzhou City, Jiangsu Province, China of this data sheet is for reference only. If there is any discrepancy between the English version and the Chinese version (or other language versions), the English version shall prevail.

\* The technical parameters contained in this data sheet may exhibit variations contingent upon the region. Universun do not guarantee their full accuracy. Due to continuous innovation, research, development and products improvements, Universun reserve the right to adjust the information in this data sheet at any time without prior notice. Clients are urged to procure the most recent version of this data sheet and incorporate it as an intrinsic component of the legally binding agreement ratified by both parties. The Chinese (or any other language) translation of this data sheet is for reference only. If there is any discrepancy between the English version and the Chinese version (or other language versions), the English version shall prevail.