


705-730W

N-type Bifacial Module US-BGH66-G12



- Bifacial technology enables additional energy harvesting from rear side (up to 30%)
- 30 years lifespan brings 10-30% additional power generation comparing with conventional P-type module
- N-type solar cell has no LID naturally LID which can increase power generation
- Excellent low irradiance performance
- Excellent anti-LID & anti-PID performance
- Industry leading lowest thermal co-efficient of power
- Optimized electrical design and lower operating current for reduced hot spot loss and better temperature coefficient
- Certified to withstand: wind load (2400 Pa) and snow load (5400 Pa)
- 100% triple EL test enabling remarkable reduction of hidden crack rate of modules

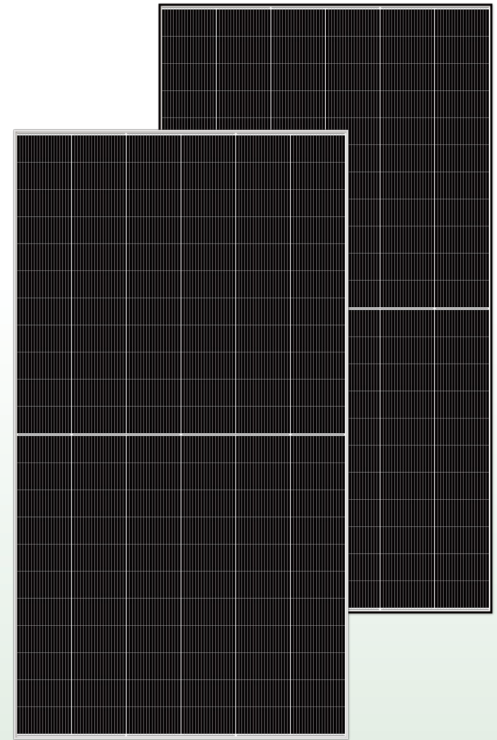

WARRANTY INSURANCE



* Optional performance warranty insurance. Please contact our local sales staff for more information.


COMPREHENSIVE CERTIFICATES



- ISO 9001: Quality Management System
- ISO 14001: Environmental Management System Standard
- ISO 45001: International Occupational Health and Safety Assessment System Standard
- SA8000: 2014 Social Accountability Management System

* Different markets have different certification requirements. Also, the products are under rapid innovation. Please confirm the certification status with regional sales representatives.

LINEAR PERFORMANCE WARRANTY

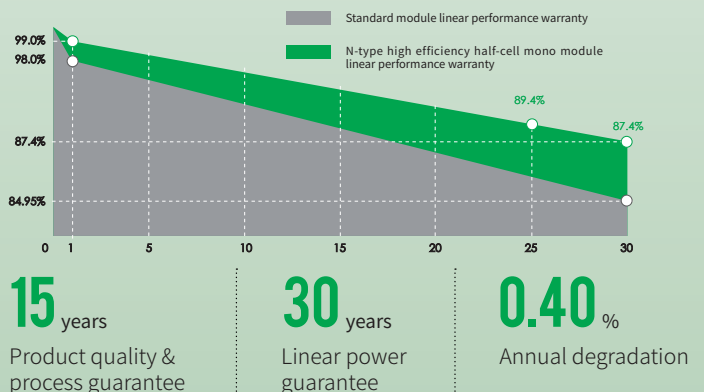

ELECTRICAL CHARACTERISTICS

Model of modules	US-BGH66(705)-G12	US-BGH66(710)-G12	US-BGH66(715)-G12	US-BGH66(720)-G12	US-BGH66(725)-G12	US-BGH66(730)-G12
	STC	STC	STC	STC	STC	STC
Maximum power – P_{mp} (W)	705	710	715	720	725	730
Open-circuit voltage – V_{oc} (V)	49.24	49.39	49.54	49.68	49.79	49.88
Short-circuit current – I_{sc} (A)	17.37	17.42	17.47	17.52	17.57	17.64
Maximum power voltage – V_{mp} (V)	42.42	42.57	42.72	42.86	43.01	43.15
Maximum power current – I_{mp} (A)	16.62	16.68	16.74	16.80	16.86	16.92
Module efficiency – η_m (%)	22.7	22.9	23.0	23.2	23.3	23.5

STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25 °C, Spectra at AM1.5

NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/s

ELECTRICAL CHARACTERISTICS WITH DIFFERENT POWER BIN (REFERENCE TO 10% IRRADIANCE RATIO)

Peak power (P_{max}) (W)	776	781	787	792	798	802
Open circuit voltage (V_{oc}) (V)	49.24	49.39	49.54	49.68	49.79	49.88
Short circuit current (I_{sc}) (A)	19.11	19.16	19.22	19.27	19.33	19.40
MPP voltage – V_{mp} (V)	42.42	42.57	42.72	42.86	43.01	43.15
MPP current – I_{mp} (A)	18.28	18.35	18.41	18.48	18.55	18.58

STRUCTURAL CHARACTERISTICS

Module dimensions (L*W*H)	2384 x 1303 x 33 mm
Weight	38.5±0.5 kg
Cell	132 cells, N-type monocrystalline
Superstrate	High Transmission, AR Coated Heat Strengthened Glass
Substrate	Heat Strengthened Glass
Frame	Anodized aluminum alloy
Junction box	IP68, 3 bypass diodes
Output wire	4.0 mm ²
Wire length	300mm/customized length
Connector	MC4 Compatible
Packaging specification	33pcs/pallet; 561 pcs/40'HQ


OPERATING PARAMETERS

Power tolerance (W)	(0,+5)
Maximum system voltage (V)	1500
Maximum rated fuse current (A)	35
Current operating temperature (°C)	-40~+85 °C
Mechanical load	5400 Pa * / 2400 Pa ∞



TEMPERATURE PERFORMANCE RATINGS

TANGRA temperature coefficient (P_{max})	-0.24 %/°C
Temperature coefficient (V_{oc})	-0.22 %/°C
Temperature coefficient (I_{sc})	+0.047 %/°C
Nominal operating cell temperature	44±2 °C

MODULE DIMENSIONS (MM)

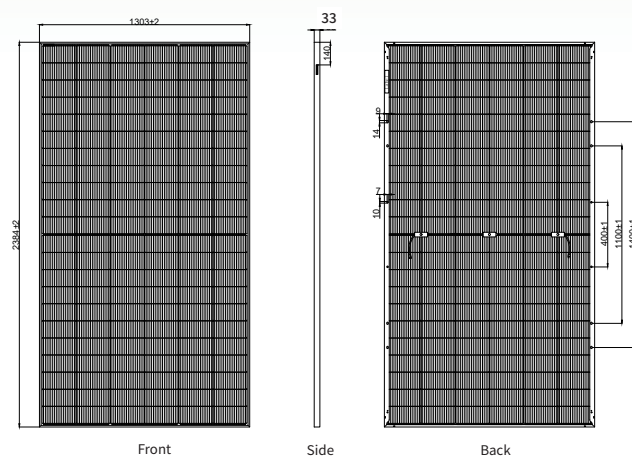

* The unmarked tolerance is ±1 mm
Length shown in mm

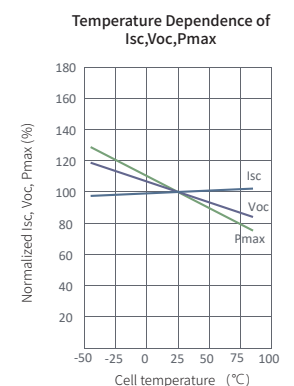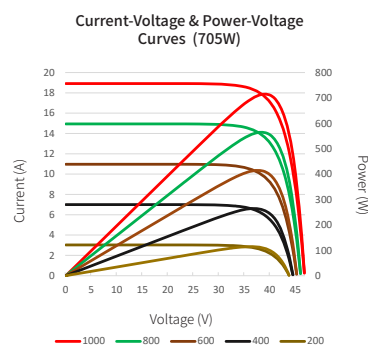

Universun Technology Co., Ltd

Room 257, No.7 Factory Building, Fuyang Industrial Square, Fuyuan Road, Chengyang Street, Economic and Technological Development Zone, Jiangcheng District, Suzhou City, Jiangsu Province, China. of this data sheet is for reference only. If there is any discrepancy between the English version and the Chinese version (or other language versions), the English version shall prevail.

* The technical parameters contained in this data sheet may exhibit variations contingent upon the region. Universun do not guarantee their full accuracy. Due to continuous innovation, research, development and products improvements, Universun reserve the right to adjust the information in this data sheet at any time without prior notice. Clients are urged to procure the most recent version of this data sheet and incorporate it as an intrinsic component of the legally binding agreement ratified by both parties. The Chinese (or any other language) translation of this data sheet is for reference only. If there is any discrepancy between the English version and the Chinese version (or other language versions), the English version shall prevail.